

Twilight Switch

PRODUCT DESCRIPTION

- Built-in photocell for dusk-dawn switching.
- Multi target lux level optional by DIP switch.
- Compact design, suitable for many luminaries.
- Patent technology can distinguish the artificial and natural light.



Item Number: **QRSR-TW-OF**

INPUT

Operating Voltage Range	187-264Vac 50 Hz
Rated Voltage	220-240Vac 50 Hz
No Load Power	≤0.5W

OUTPUT

Type of Load	≤800W (resistive), ≤400W (inductive/ LED)
Working Mode	On/off

SENSOR PARAMETERS

Daylight Threshold	On/Off 5lux/25lux,10lux/50lux,25lux/75lux,50lux/100lux,100lux/200lux, 150lux/300lux, 200lux/400lux, disable
--------------------	---

OPERATING ENVIRONMENT

Operating Temperature	25°C...+60°C
-----------------------	--------------


STANDARDS

Certificate	CE
-------------	----

OTHERS

Wiring	press-in terminal *4
IP Rating	IP20 (built-in)
Protection Class	Class 2
Installation Size	46.5mm (external shell:46mm*36mm*22mm)
Package	White bag+Clapboard + Carton(K=A)
Warranty	2 years warranty.

DIMENSION DRAWING

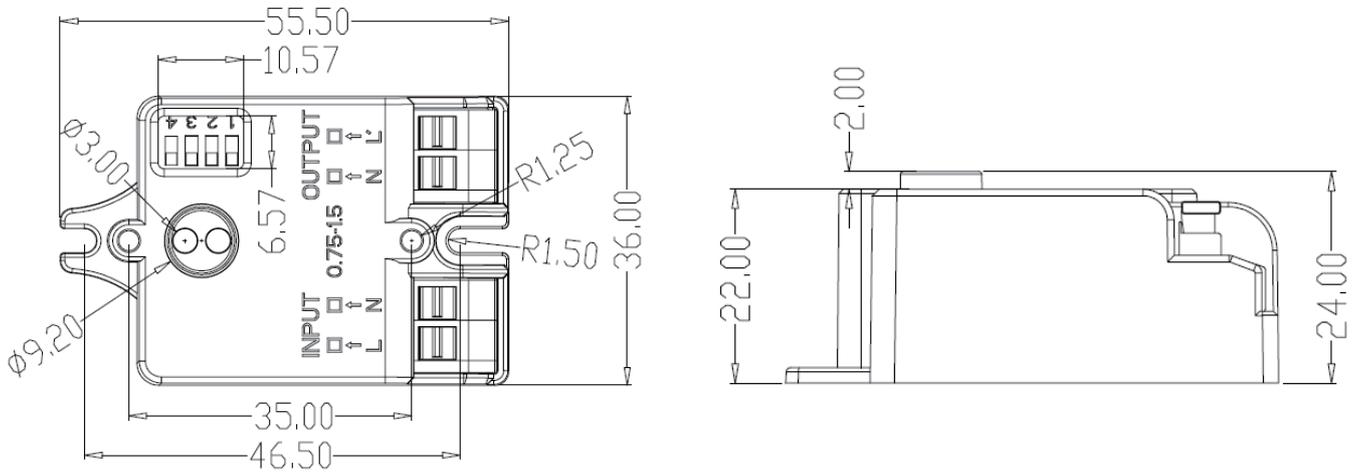

WIRING

